

Shasons®

SINCE 1978

4 JAW INDEPENDENT CHUCKS


- BODY is of high strength cast iron, designed to provide maximum rigidity with minimum weight & overhang.
- JAWS are case hardened and ground where required. Jaws are of sufficient length to prevent tilt and rapid wear.
- PINIONS are of alloy steel with uniform hardness. Square threads of pinions are precisely cut to reduce pitch error resulting in a smooth movement. These are ground on the diameter & are interchangeable.
- LOCKS are of alloy steel & ground on the fitting diameter for precise fit. Locks are interchangeable.
- SPARES are easily available for quick & better service.

Standard Accessories:

- Key Handle
- Mounting Bolts



- All Components of **Shasons** Chucks are stamped to avoid duplicacy.

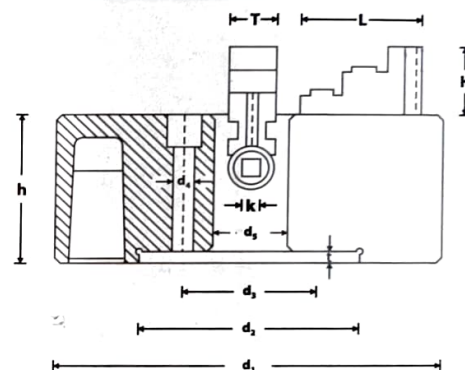

Specifications

Size	d1	d2	d3	d4	d5	t	h	k	T	L	H	G. Wt in Kg.
100	101	80	60	M8	25	5	53	6	19	47	22	3
6"L.W.	153	70	58	M8	40	5	54	6	19	47	22	5
160	161	125	140	M8	45	6	66	8	24	54	23	8
200	201	95	80	M8	50	8	81	10	29	73	30	14
250	251	125	105	M12	60	9	81	10	29	73	35	21
305	306	160	130	M12	75	11	91	12	34	100	46	36
350	351	160	130	M12	85	11	91	12	34	110	50	44
400	401	200	171	M16	100/127	11	101	14	40	120	55	65
BB BR-400	401	260	230	M20	127/160	13	101	14	40	120	55	65
450	451	200	171	M16	100/127	11	101	14	40	120	60	75
BB BR-450	451	260	230	M20	127/160	13	101	14	40	120	60	75
510	512	260	230	M20	160	13	125	14	47	145	65	115
610	612	260	230	M20	160	13	125	14	47	170	70	150

Specifications may vary from Catalogue due to improvements

Manufactured by:

SHASONS UDYOG (INDIA)

Authorised Distributor: